

(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 139 041 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
04.10.2001 Bulletin 2001/40

(51) Int Cl.⁷: **F25B 49/00**, F25B 7/00,
F25D 21/06, F25D 29/00

(21) Application number: 01107698.1

(22) Date of filing: 28.03.2001

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Tamaoki, Yuichi
Ora-gun, Gunma 370-0518 (JP)
• Miyoshi, Tetsuya
Tatebayashi-shi, Gunma 374-0007 (JP)

(30) Priority: 31.03.2000 JP 2000098378

(74) Representative: Glawe, Delfs, Moll & Partner
Patentanwälte
Postfach 26 01 62
80058 München (DE)


(71) Applicant: Sanyo Electric Co., Ltd.
Moriguchi-shi, Osaka (JP)

(54) Repository and monitoring system therefor

(57) A repository including: an input unit (3) for setting the temperature of the interior (2) of a repository (1); a measuring unit (5,6) for measuring the temperature of the interior of the repository (1); a controller (4) for holding ID data to specify the repository itself and communicatively outputting the measurement data to the external; and an auxiliary power source (13) for communicat-

ing the measurement data to the external even during interruption of power supply. A central controller 11 for collecting the measured data from each repository and judging whether abnormality occurs or not is connected to plural repositories to fabricate a monitoring system. When abnormality is detected, the measured data as well as ID data and time data are transmitted to a user through the Internet.

FIG. 1

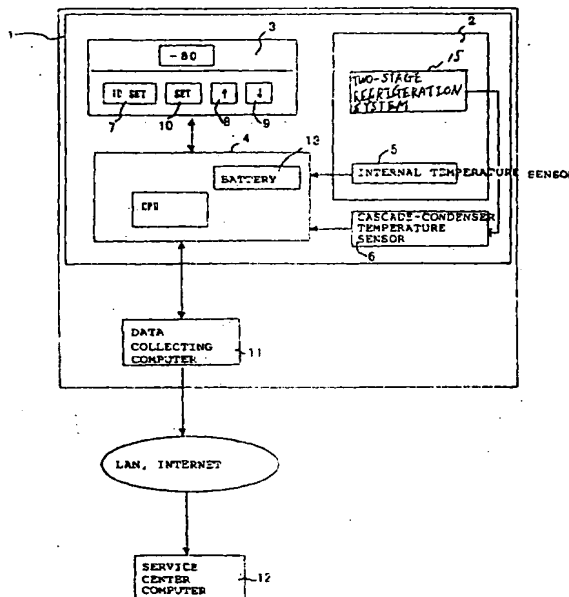

EP 1 139 041 A2

Description

BACKGROUND OF THE INVENTION

1. Field of the Invention

[0001] The present invention relates to technique for use in a remote monitoring system for monitoring repositories such as a freezer, an ultra-low-temperature freezer, a refrigerator, a cold reserving repository, etc., and particularly to a repository for which some physical quantities such as temperature, pressure, volume, etc. are controlled, a remote monitoring system suitable for monitoring the variation of a physical quantity of the repository, an information terminal for controlling the monitoring operation of the remote monitoring system.

2. Description of the Related Art

[0002] A remote monitoring system for repositories is disclosed in Japanese Laid-open patent Application No. Hei-6-88666. According to this monitoring system, an auxiliary cooling operation is carried out when there occurs such an abnormal condition that the temperature of the interior of a freezer is varied due to failure of a compressor installed in the freezer or interruption (failure) of electric power supply thereto, and also an alarm for notifying occurrence of the abnormal condition is automatically issued. The monitoring system disclosed in the above publication includes a temperature sensor for detecting the temperature in the freezer, an auxiliary cooling device using liquid carbonic acid gas, etc. for carrying out the auxiliary cooling operation of the interior of the freezer in response to an alarm output from the temperature sensor, an automatic telephone signal emitting terminal for automatically sending an alarm (artificial voice) to a supervisory specialist agent (or user) through a public telephone line in response to the alarm output from the temperature sensor, and a system of a user company which is the owner of the freezer and receives the alarm from the automatic telephone signal emitting terminal.

[0003] According to the conventional monitoring system described above, an alarm is generated and output with an artificial voice to a user company or the like through a public telephone line by the automatic telephone signal emitting terminal when some abnormality occurs in the freezer. Therefore, the user can merely know occurrence of some abnormality in his/her freezer, however, he/she cannot know the content of the abnormality itself because the alarm is merely output with an artificial voice.

[0004] Besides, there is also known a technique of notifying occurrence of an abnormality through E-mail although this technique does not direct to monitor the temperature of a freezer. According to this technique, since only occurrence of an abnormality is merely transmitted through E-mail, the user can merely known occurrence

of some abnormality, and thus he/she cannot know the detailed information on the abnormality because the alarm is merely output with a predetermined alarm message.

SUMMARY OF THE INVENTION

[0005] Therefore, the present invention has been implemented in view of the foregoing situation, and has an object to provide a repository which can be easily monitored when it is under surveillance.

[0006] Another object of the present invention is to provide a repository from which measurement data can be automatically output to a user when some abnormality occurs even under the state that power supply fails.

[0007] Further object of the present invention is to provide a repository for which internal temperature records and trouble forecasts can be easily implemented and client supports can be also easily performed.

[0008] Further object of the present invention is to provide a monitoring system for monitoring abnormality of the repository.

[0009] In order to attain the above objects, according to a first aspect of the present invention, there is provided a repository for keeping things under a predetermined fixed environmental condition, including: an input unit for inputting a target internal temperature of the main body of the repository; a measuring unit for measuring the internal temperature of the main body of the repository; a controller for communicatively outputting the measurement data obtained by the measuring unit to the external; and an unit for enabling the controller to output the measurement data to the external even during interruption of power supply.

[0010] The above repository may include a two-stage refrigeration system comprising two refrigeration circuits which are cascade-connected to each other and perform heat exchange, and a temperature measuring unit for measuring the temperature of a thermally-coupled portion of said two refrigerant circuits.

[0011] In the repository, the thermally-coupled portion is a cascade-condenser of the two-stage refrigeration system.

[0012] In the repository, the controller may hold ID data to specify the repository itself.

[0013] In the repository, the unit may be an auxiliary power source for applying power to the controller to output the measurement data to the external even during the interruption of power supply.

[0014] The repository may further include a refrigeration circuit having an evaporator equipped with a defrost sensor, and another measuring unit for measuring the temperature of the defrost sensor, wherein the measured data of the temperature of the defrost sensor are also output to the external.

[0015] According to a second aspect of the present invention, there is provided a monitoring system for at least one repository for keeping things under a prede-

terminated fixed environmental condition, characterized by comprising: an input unit for inputting a target internal temperature of the main body of the repository; a measuring unit for measuring the internal temperature of the main body of the repository; a controller for receiving the measurement data from the measuring unit and communicatively outputting the measurement data; a central controller for receiving the measurement data from the controller and comparing the measured internal temperature with the target internal temperature and outputting the measurement data obtained by said measuring unit to the external if the difference between the measured internal temperature and the target internal temperature is larger by a threshold value.

[0016] In the monitoring system, the central controller adds time data to the measured data and distributes the measured data added with the time data together with ID data representing the repository concerned through the Internet to prescribed Internet addresses.

[0017] The repository further includes an auxiliary power source for enabling the data communication between the controller and the central controller even during interruption of power supply.

[0018] In the repository, the data communication between the controller and the central controller is carried out by using a predetermined communication protocol.

[0019] According to a third aspect of the present invention, there is provided a monitoring system for a plurality of repositories for keeping things under a predetermined fixed environmental condition, characterized by comprising: an input unit which is equipped to each repository to input a target physical quantity affecting the environmental condition of each repository; a measuring unit which is equipped to each repository to measure the physical quantity affecting the environmental condition of the repository; a controller which is equipped to each repository to hold ID data specifying the repository itself and output the measurement data of the physical quantity obtained by the measuring unit to the external; a central controller for collectively receiving the measured data and the ID data from the controller of each repository, judging on the basis of the measured data whether some abnormality occurs in the physical quantity, and outputting the measured data and the ID data while adding the measured data with time data representing the measurement time if it is judged that some abnormality occurs in the physical quantity; and a distribution unit for distributing the data output from the central controller to desired Internet addresses through the Internet if it is judged that some abnormality occurs in the physical quantity.

[0020] In the monitoring system, the physical quantity is the temperature of the interior of each repository.

[0021] The monitoring system may further include an auxiliary power source which is equipped to each repository to enable the data communication between the controller and the central controller even during interruption of power supply.

BRIEF DESCRIPTION OF THE DRAWINGS

[0022]

Fig. 1 is a block diagram showing a repository according to an embodiment of the present invention; Fig. 2 is a schematic diagram showing a two-stage refrigeration system (cascade refrigeration system);

Fig. 3 is a diagram showing the connection of a monitoring system for the repository according to the present invention; and

Fig. 4 is a flowchart showing the monitoring operation of the monitoring system.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0023] Preferred embodiments of the present invention will be described hereunder with reference to the accompanying drawings. In the following description, the term of "repository" is used to have a broader meaning. For example, it covers a space which can be closed to keep something therein, such as a case, a container, storage, a storage shed, a storage chamber, a stockroom, a storage warehouse, etc. Particularly, if the temperature control is required to the repository, the repository may be a cold reserving repository such as a freezer, a refrigerator or the like, a hot reserving repository or the like.

[0024] Fig. 1 shows a monitoring system containing a repository according to an embodiment of the present invention, and Fig. 2 is a schematic diagram of a two-stage refrigeration system (circuit) used to cooling/heating the interior of the repository.

[0025] In Fig. 1, reference numeral 1 represents a cold reserving (refrigerating) repository (for example, an ultra-low-temperature freezer), reference numeral 2 represents the main body of the repository 1, and reference numeral 3 represents an operating unit for displaying the temperature of the interior of the main body 2 of the freezer 1 and setting/ inputting a desired (target) temperature. Reference numeral 4 represents a control board unit which is equipped with CPU and controls the overall operation of the freezer 1, and reference numeral 5 represents an in-freezer temperature measuring sensor for detecting the temperature of the interior of the main body 2 of the freezer 1.

[0026] In this embodiment, the repository 1 includes a two-stage refrigeration system (cascade refrigeration system) 15 containing two cascade-connected refrigeration circuits (high temp. side refrigeration circuit 16 and low temp. side refrigeration circuit 17), and each refrigeration circuit has a heat exchange portion (condenser, evaporator, cascade-condenser) for performing heat exchange as shown in Fig. 2. The high temp. side refrigeration circuit 16 includes a high temp. side compressor 18, a pre-condenser 19, a condenser 20, a capillary

tube 21 and an evaporator serving as a part of a cascade condenser 26. The low temp. side refrigeration circuit 17 includes a low temp. side compressor 22, a pre-cooler 23, a condenser serving as a part of the cascade-condenser 26, a capillary tube 24 and an evaporator 25.

[0027] Reference numeral 6 represents a temperature sensor for measuring the temperature in the neighborhood of a thermally-coupling portion of the high and low temp. side refrigeration circuits 16 and 17, for example, in the neighborhood of the cascade-condenser 26 of the two-stage refrigeration system 15.

[0028] Reference numeral 7 represents a setting start button of setting ID data of the freezer 1, and reference numerals 8 and 9 represent up and down buttons for increasing/decreasing the target temperature respectively. The ID data value, the target temperature, etc. are set by using these buttons. Reference numeral 10 represents a temperature setting operation start button, and reference numeral 11 represents an information terminal such as a portable (note type) computer in which a battery for data collection or the like is installed.

[0029] In Fig. 1, the freezer 1 and the information terminal 11 are connected to each other in one-to-one correspondence, however, a plurality of cold reserving repositories (freezers) 1 are actually connected to the single information terminal 11. These plural freezers can be discriminated from one another on the basis of the ID data allocated to the respective freezers. The connection between the information terminal 11 and each freezer (control board 4) may be connected to each other through a cable or wirelessly.

[0030] Reference numeral 12 represents a computer of a service center which monitors the condition of each freezer. The service center computer 12 and the data collection computer 11 are connected to each other through LAN, the Internet or the like to communicate data with each other.

[0031] Reference numeral 13 represents a battery (auxiliary power source). For example, when power supply to the freezer 1 fails due to some accident, the interruption of power supply is notified with a buzzer (not shown) or lamp (not shown) by the battery, and also the data communication between the information terminal 11 and the control board unit 4 is enabled by the battery 13.

[0032] As described above, the information terminal 11 may be also connected to other freezers (not shown), and it communicates with the control board unit of each freezer to collect the ID data, the target (set) internal temperature, the measured internal temperature, the temperature in the neighborhood of the heat exchange portion, etc. from each freezer (repository). The information terminal 11 adds a data collection time to the collected data every freezer, and records them as a data file. The data of each data file are automatically transmitted to a destination having a predetermined Internet address (E-mail address).

[0033] In this embodiment, not only the measurement

data on the internal temperature of the repository, but also the measurement data on the temperature in the neighborhood of the heat exchange portion (for example, the cascade-condenser) of the two-stage refrigeration system are transmitted to the control board 4, and further transmitted to the data collecting computer 11. The measurement data on the temperature in the neighborhood of the heat exchange portion is also transmitted to more clearly estimate a cause of abnormality.

[0034] For example, if an abnormal variation occurs in the internal temperature of the repository, the measured data of the internal temperature thus abnormally varying are transmitted to a user through E-mail. The user can know the abnormal variation of the internal temperature of the repository and also the measurement data on the temperature variation. However, the user has not yet been able to estimate a cause by which the internal temperature is abnormally varied. When the measurement data on the temperature in the neighborhood of the heat exchange portion (or the measurement data on other thermally coupled portions) are transmitted together with the measurement data on the internal temperature of the repository, the user also checks the measurement data on these measurement data of the thermally coupled portions.

[0035] If these measurement data are normal values, the user can recognize that abnormality occurs in other places than the two-stage refrigeration system, and thus the user can use these data for elimination by comparison to specify the cause of the abnormality. On the other hand, if these measurement data are abnormal values, the user can recognize that abnormality occurs in the two-stage refrigeration system. Accordingly, the user can estimate that the abnormality in the internal temperature of the repository may occur due to failure of a compressor, leakage of refrigerant or a power failure, that is, the user can use these measurement data to specify the cause of the abnormality.

[0036] As described above, if various measurement data on the physical quantities (temperature, pressure, volume, etc.) of the parts of the repository as well as the internal temperature of the repository are transmitted through E-mail, the user can more easily and surely estimate whether the currently occurring abnormality needs an urgent countermeasure or not, and thus the user can take a countermeasure more surely.

[0037] The transmission of the measurement data on the temperature of the thermally-coupled portion (the physical quantities of the parts of the repository) as well as the internal temperature of the repository may be set by user's choice on a transmission data item. However, it is preferable to set the transmission data item so that these measurement data are transmitted together with the measurement data on the internal temperature of the repository through the Internet.

[0038] Further, in a refrigeration circuit, a defrost sensor is provided to an evaporator to prevent occurrence of frost in the evaporator. In any case where the present

invention is applied to a two-stage refrigeration system or a refrigeration circuit, another measuring unit for detecting the temperature of the defrost sensor may be provided and also transmitted to the user through the Internet together with the measurement data of the internal temperature to specify the cause of the abnormality.

[0039] Fig. 3 shows the connection arrangement of the respective units of the monitoring system according to the present invention, and Fig. 4 is a flowchart showing the monitoring operation of the monitoring system.

[0040] In the monitoring system shown in Fig. 3, two ultra-low-temperature freezers 1 are assumed to be connected to the information terminal 11 through RS485. An ID "0" is allocated to one freezer 1 while an ID "1" is allocated to the other freezer 1.

[0041] According to the monitoring operation of the monitoring system, the freezer is powered on (or the monitoring operation is started), the information terminal 11 first requests each of the freezers 1 to output measurement data such as the internal temperature, etc. at a predetermined time interval (S1). In response to the request from the information terminal 11, each freezer transmits the measurement data such as the internal temperature, etc. as well as the ID data thereof through RS485 to the information terminal 11 (S2).

[0042] The information terminal 11 judges on the basis of the measurement data transmitted from each freezer 1 whether some abnormality occurs (S3). If the information terminal 11 judges that some abnormality occurs (S3: Yes), the ID data of the freezer under abnormality, item names of abnormal measurement data, the values of the abnormal measurement data, etc. are transmitted through LAN to an E-mail server 14, and then transmitted through the Internet to a predetermined E-mail address (indicating a specific user) (S4). For example, the judgment on the abnormality may be carried out by comparing the measured data value with the set target value which is input by the operating unit 3 in advance and judging occurrence of abnormality if the difference between the measured data value and the target value is larger by a threshold value or more. If the information terminal 11 judges that no abnormality occurs, the processing goes to step S1. After the information terminal 11 transmits the abnormal measurement data, etc. to the user, its processing returns to the step S1. The destination of the E-mail address may be a cellular phone, a personal computer of an individual, a service center or the like. Here, the information terminal 11 and the E-mail server 13 may be operated for a predetermined time by UPS (Uninterruptive Power Supply) (not shown) under interruption of power supply.

[0043] In the above embodiments, only when some abnormality occurs, the measurement data, etc. are output to the user, etc. However, the measurement data, etc. may be output to the user, etc. at all times even under normal operation. That is, the destination to which the E-mail is transmitted may be added or changed be-

tween the normal operation and the abnormal operation. Further, the title of an E-mail may be set as "abnormal/alarm" under abnormal operation (when some abnormality occurs) while it is set as "normal/periodical communication" under normal operation.

[0044] In the above embodiments, abnormality of the internal temperature of a repository (freezer, storage or the like) is detected, and the measurement data of the repository are output to the user. However, the physical quantity in which abnormality is detected is not limited to the internal temperature of the repository. For example, the temperature of a defrost sensor of a cooler of a cooling circuit equipped to a freezer or the temperature of other parts may be measured and output to the external. Further, physical quantities other than the temperature, such as the number of revolution of a compressor, the voltage of a power supply source, etc. which are relating to the monitoring operation of a repository may be targeted as quantities to which abnormality is detected. In this case, it is needless to say that when some abnormality is detected in these quantities, the measurement data on these quantities are automatically transmitted to the user through the Internet or the like.

[0045] Further, in the above embodiments, an object for which a physical quantity such as temperature or the like is detected is a repository. However, the object of the present invention is not limited to the repository, and the present invention may be applied to other objects for which control of some physical quantity such as temperature, pressure, volume, voltage, intensity or the like is needed.

[0046] In the above embodiments, it is needless to say that an alarm device for making an alarm with light (alarm lamp) or with sound (buzzer) may be provided to each repository. In this case, the control board 4 of each repository may compare the measured internal temperature with a threshold temperature and controls the alarm lamp or the buzzer to emit light or sound if the measured internal temperature exceeds the threshold value.

[0047] The data communication between the information terminal 11 and the plural repositories under monitoring may be automatically carried out on the basis of a well known communication protocol such as a polling communication protocol or the like.

[0048] In the above embodiments, the E-mail transmission function may be provided to each repository. However, in this case, the total cost of the monitoring system is increased. Therefore, it is preferable that the E-mail function is provided to the only the information terminal. Accordingly, the measurement data obtained in each repository are transmitted to the information terminal to be subjected to some data processing, and then the measurement data thus processed are transmitted from the information terminal to the outside.

[0049] In the above embodiments, the measurement data of each repository (control board 4) may be output to the information terminal 11 through each data wire.

However, in this case, the wiring work is very difficult. Therefore, it is preferable that a controller (control board 4) is provided to each repository and the measurement data of each repository is communicatively transmitted from each controller 4 to the information terminal 11 through a cable or wirelessly (preferably, according to a predetermined communication protocol). The information terminal 11 collectively receives the measurement data from the respective controllers 4 and carries out the predetermined processing on these data. In this case, since ID data is allocated to each repository (controller), the information terminal 11 can discriminate the respective controllers from one another.

Claims

1. A repository for keeping things under a predetermined fixed environmental condition, including:

an input unit (3) for inputting a target internal temperature of the main body (2) of said repository (1);
 a measuring unit (5) for measuring the internal temperature of the main body (2) of said repository (1);
 a controller (4) for communicatively outputting the measurement data obtained by said measuring unit (5) to the external; and
 an unit (13) for enabling said controller (4) to output the measurement data to the external even during interruption of power supply.

2. The repository as claimed in claim 1, further including a two-stage refrigeration system (15) having two refrigeration circuits (16, 17) which are cascade-connected to each other and perform heat exchange, and a temperature measuring unit (6) for measuring the temperature of a thermally-coupled portion (26) of said two refrigeration circuits.

3. The repository as claimed in claim 2, wherein said thermally-coupled portion is a cascade-condenser (26) of said two-stage refrigeration system.

4. The repository as claimed in claim 1, wherein said controller holds ID data to specify said repository itself.

5. The repository as claimed in claim 1, wherein said unit is an auxiliary power source (13) for applying power to said controller to communicatively output the measurement data to the external even during the interruption of power supply.

6. The repository as claimed in claim 1, further including: a refrigeration circuit containing an evaporator equipped with a defrost sensor; and another meas-

uring unit for measuring the temperature of said defrost sensor, the measured data of the temperature of said defrost sensor being also output to the external.

7. A monitoring system for at least one repository for keeping things under a predetermined fixed environmental condition, including:

an input unit (3) for inputting a target internal temperature of the main body (2) of said repository (1);
 a measuring unit (5) for measuring the internal temperature of the main body of said repository;
 a controller (4) for receiving the measurement data from said measuring unit and communicatively outputting the measurement data;
 a central controller (11) for receiving the measurement data from said controller and comparing the measured internal temperature with the target internal temperature and outputting the measurement data obtained by said measuring unit to the external if the difference between the measured internal temperature and the target internal temperature is larger by a threshold value.

8. The monitoring system as claimed in claim 7, wherein said central controller (11) adds time data to the measured data and distributes the measured data added with the time data together with ID data representing the repository concerned through the Internet to prescribed Internet addresses.

9. The repository as claimed in claim 7, further including an auxiliary power source (13) for enabling the data communication between said controller (4) and said central controller (11) even during interruption of power supply.

10. The repository as claimed in claim 9, whereby the data communication between said controller and said central controller is carried out by using a predetermined communication protocol.

11. A monitoring system for a plurality of repositories for keeping things under a predetermined fixed environmental condition, comprising:

an input unit (3) which is equipped to each repository to input a target physical quantity affecting the environmental condition of each repository;
 a measuring unit (5) which is equipped to each repository to measure the physical quantity affecting the environmental condition of said repository;

a controller (4) which is equipped to each repository to hold ID data specifying said repository itself and communicatively output the measurement data of the physical quantity obtained by said measuring unit to the external; 5
a central controller (11) for collectively receiving the measured data and the ID data from said controller of each repository, judging on the basis of the measured data whether some abnormality occurs in the physical quantity, and outputting the measured data and the ID data while 10
adding the measured data with time data representing the measurement time if it is judged that some abnormality occurs in the physical quantity; and 15
a distribution unit (14) for distributing the data output from said central controller (11) to desired Internet addresses through the Internet if it is judged that some abnormality occurs in the 20
physical quantity. 25

12. The monitoring system as claimed in claim 11, wherein the physical quantity is the temperature of the interior of each repository. 30

13. The monitoring system as claimed in claim 11, further including an auxiliary power source (13) which is equipped to each repository to enable the data communication between said controller and said central controller even during interruption of power supply. 35
40
45
50
55

FIG. 1

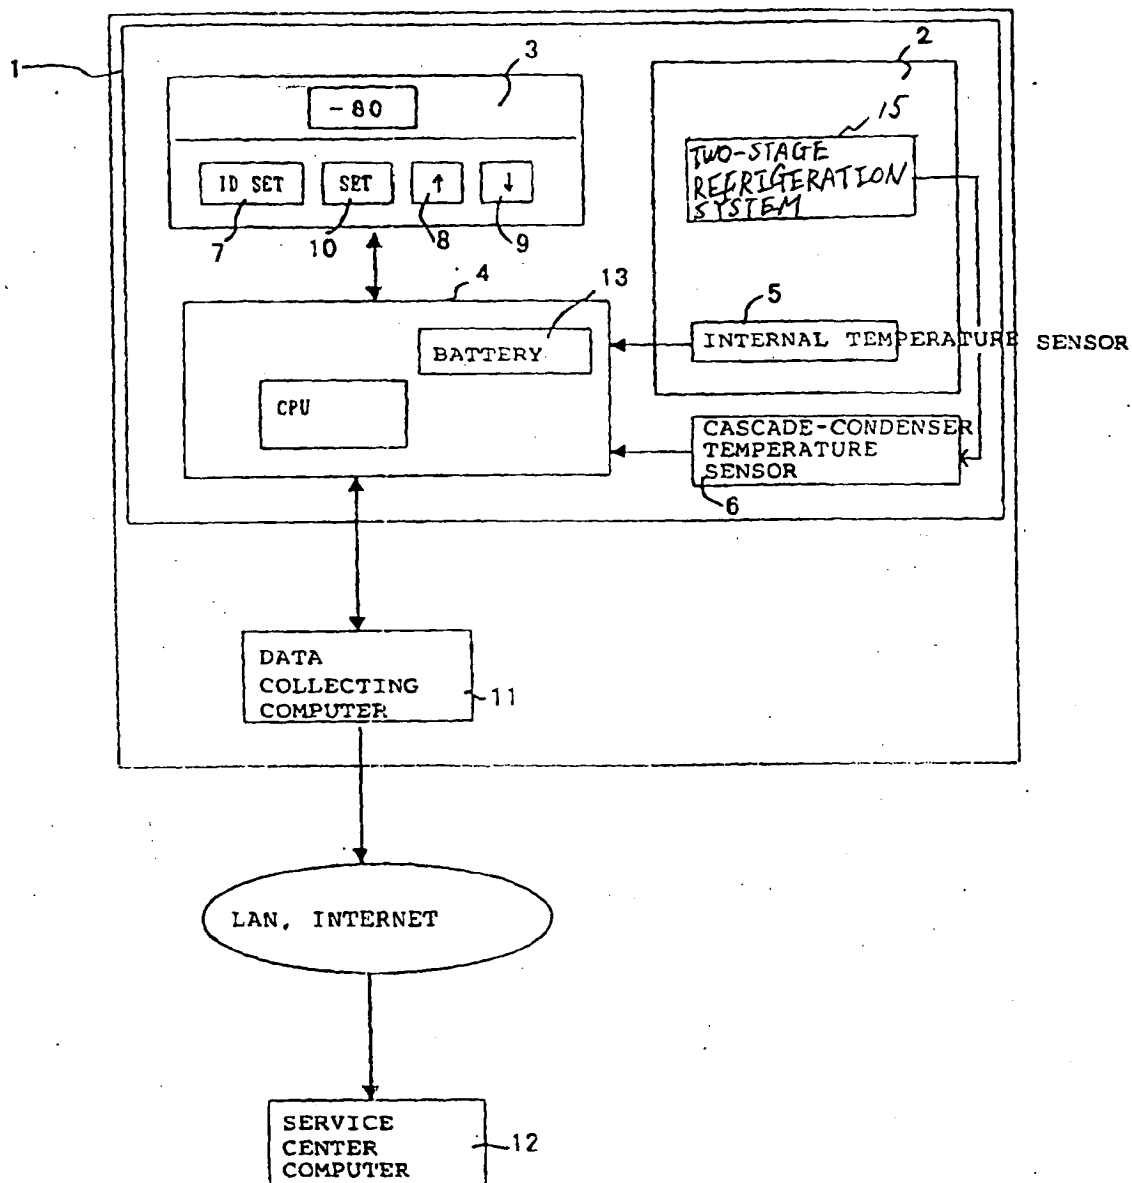


FIG. 2

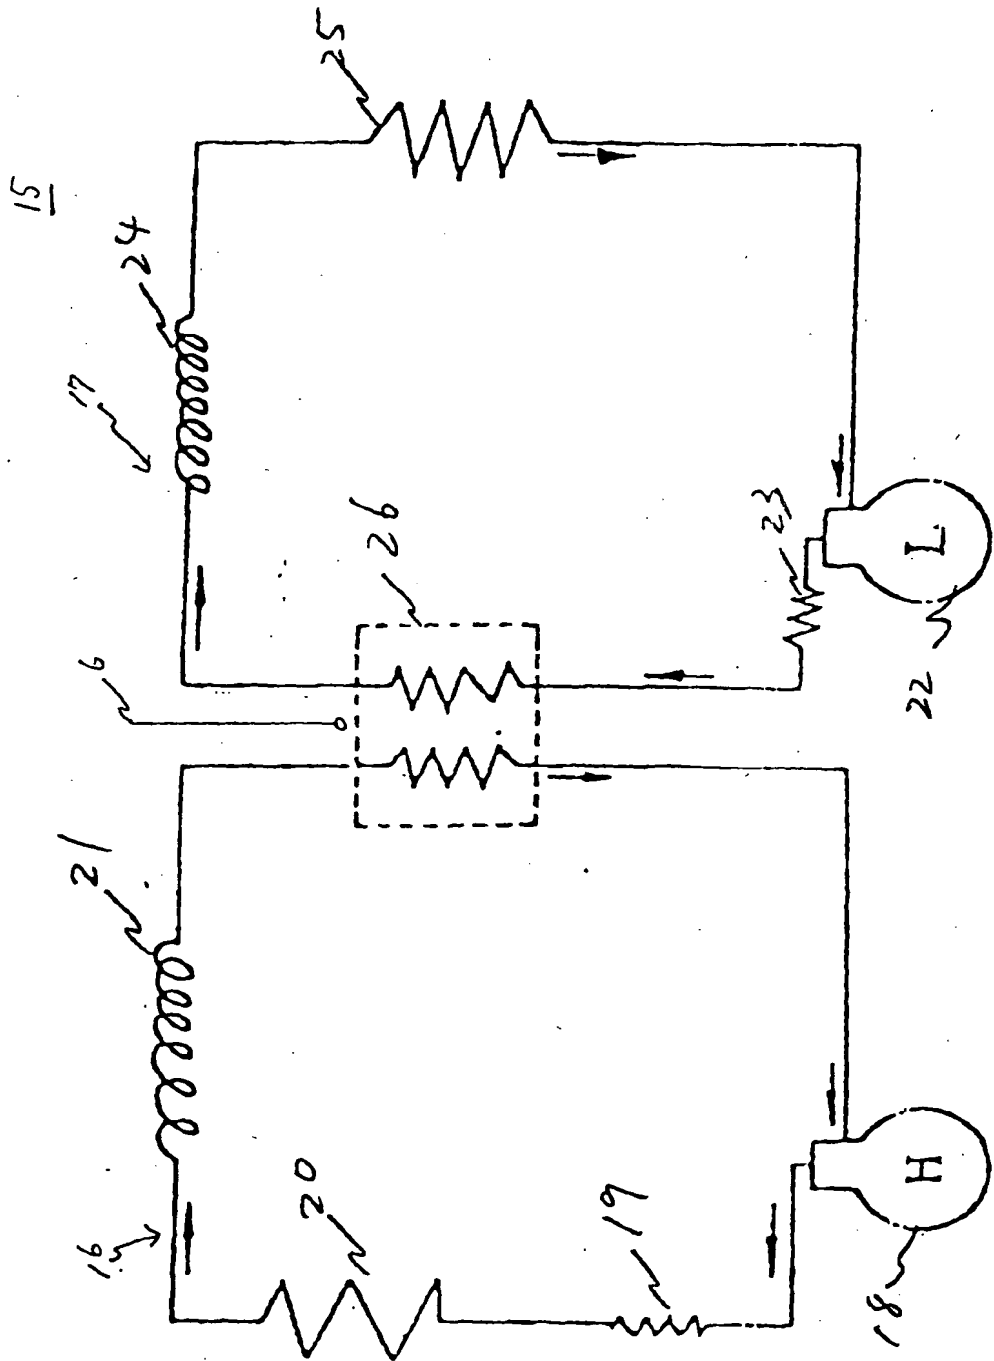


FIG. 3


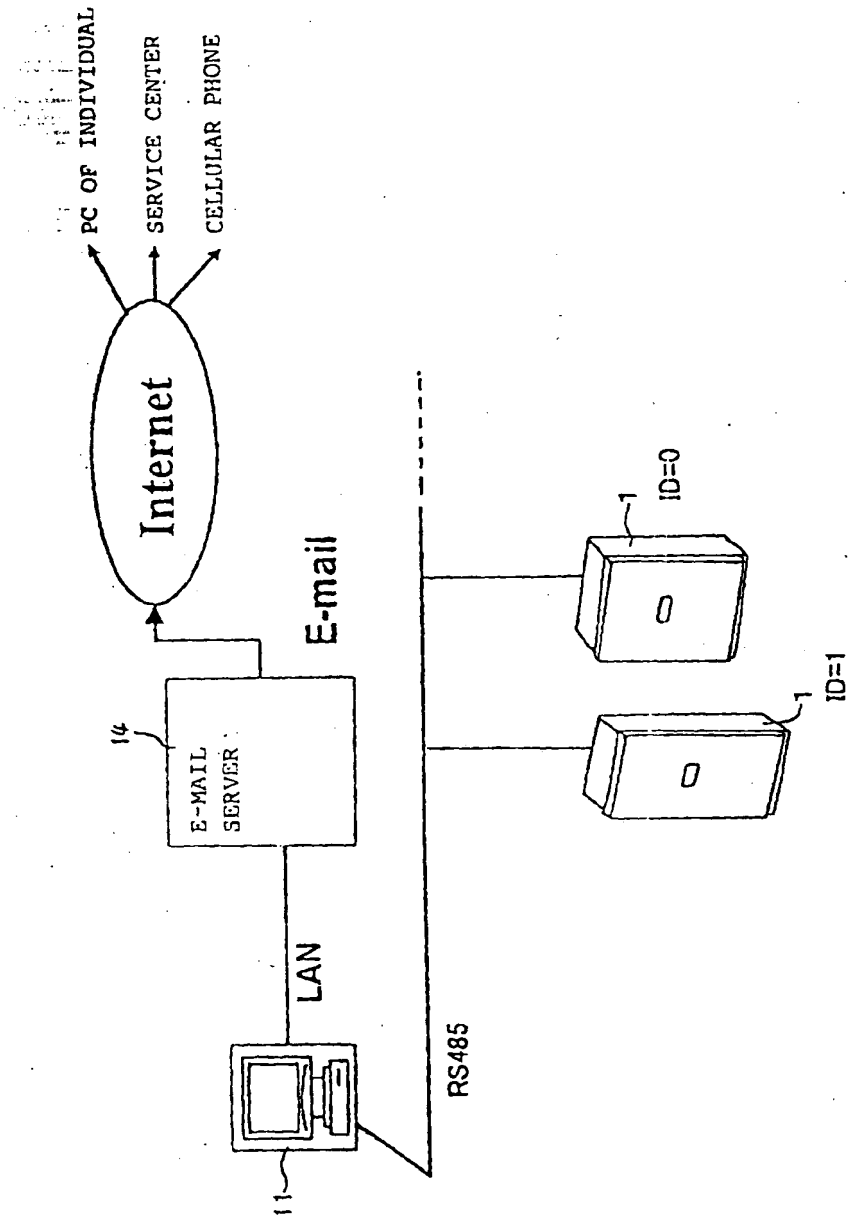


FIG. 3



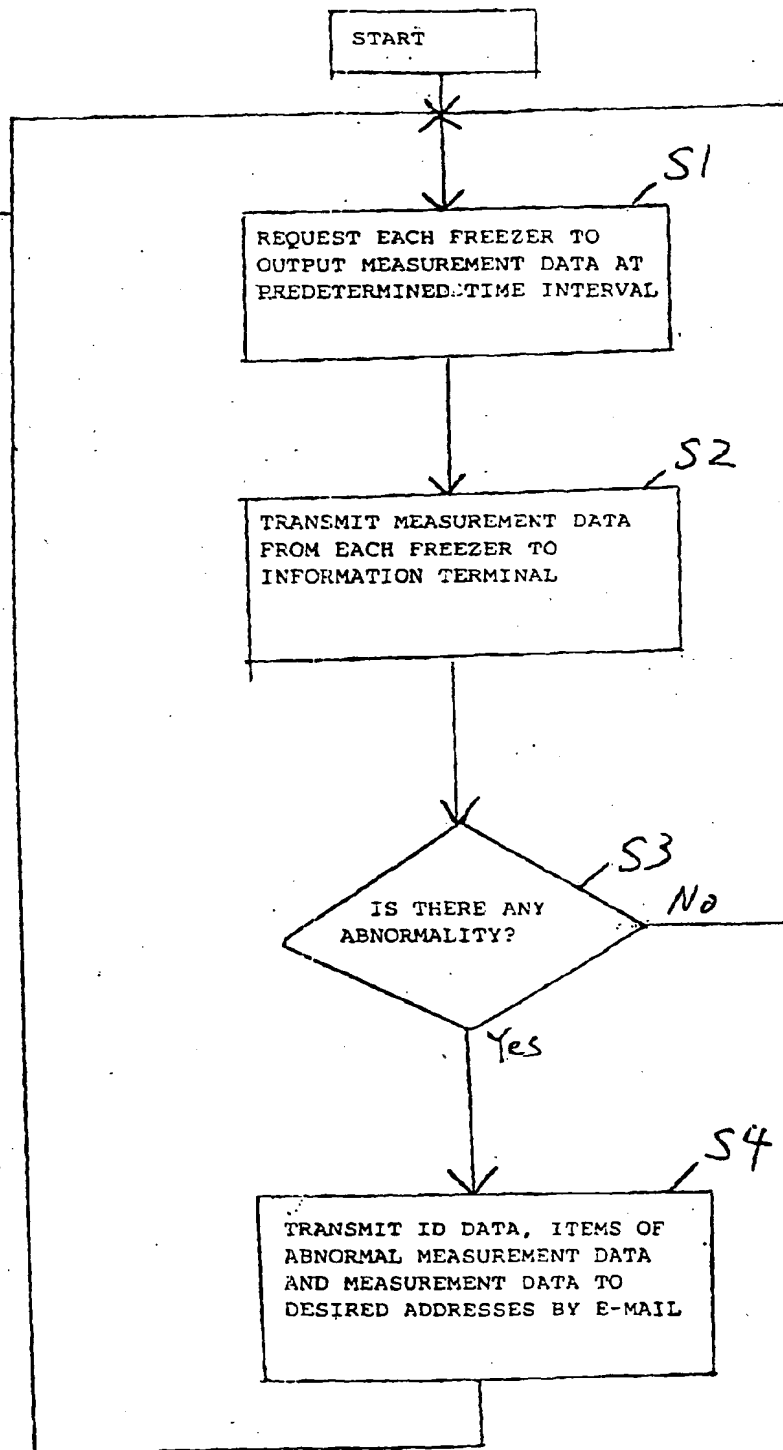

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
11.09.2002 Bulletin 2002/37

(51) Int Cl.7: **F25B 49/00, F25B 7/00,
F25D 21/06, F25D 29/00**

(43) Date of publication A2:
04.10.2001 Bulletin 2001/40

(21) Application number: **01107698.1**

(22) Date of filing: **28.03.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Tamaoki, Yuichi**
Ora-gun, Gunma 370-0518 (JP)
• **Miyoshi, Tetsuya**
Tatebayashi-shi, Gunma 374-0007 (JP)

(30) Priority: **31.03.2000 JP 2000098378**


(74) Representative: **Glawe, Delfs, Moll & Partner**
Patentanwälte
Postfach 26 01 62
80058 München (DE)

(71) Applicant: **Sanyo Electric Co., Ltd.**
Moriguchi-shi, Osaka (JP)

(54) **Repository and monitoring system therefor**

(57) A repository including: an input unit (3) for setting the temperature of the interior (2) of a repository (1); a measuring unit (5,6) for measuring the temperature of the interior of the repository (1); a controller (4) for holding ID data to specify the repository itself and communicatively outputting the measurement data to the external; and an auxiliary power source (13) for communicating the measurement data to the external even during interruption of power supply. A central controller 11 for collecting the measured data from each repository and judging whether abnormality occurs or not is connected to plural repositories to fabricate a monitoring system. When abnormality is detected, the measured data as well as ID data and time data are transmitted to a user through the Internet.

FIG. 1

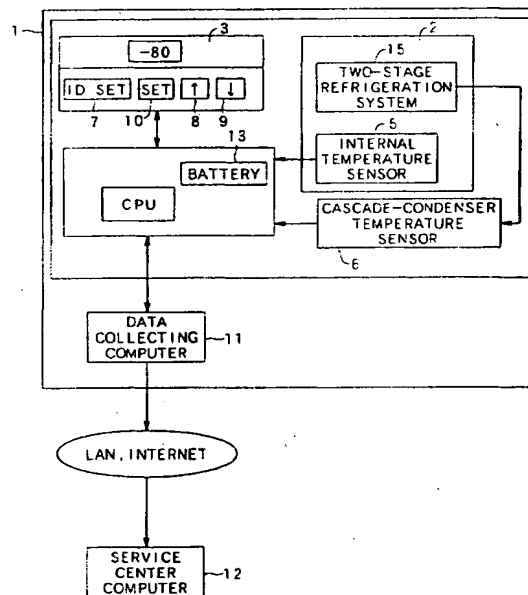



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 10 7698

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	FR 2 647 538 A (CAPPA ROBERT ;BOUHOU JACQUELINE (FR)) 30 November 1990 (1990-11-30) * the whole document *	1, 4, 5	F25B49/00 F25B7/00 F25D21/06 F25D29/00
X	EP 0 453 302 A (WHITBREAD & CO LTD) 23 October 1991 (1991-10-23) * the whole document *	7-11	
X	FR 2 574 916 A (CHEVAILLIER ERIC) 20 June 1986 (1986-06-20) * the whole document *	1, 4-6	
Y		2, 3	
Y	EP 0 227 504 A (FROILABO SA) 1 July 1987 (1987-07-01) * the whole document *	2, 3	
A	US 3 491 544 A (WEBBER ROBERT C) 27 January 1970 (1970-01-27) * the whole document *	2, 3	
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 01, 29 January 1999 (1999-01-29) & JP 10 276478 A (TOSHIBA CORP), 13 October 1998 (1998-10-13) * abstract *	8	TECHNICAL FIELDS SEARCHED (Int.Cl.7) F25B F25D G08B H04Q G05D
A	US 3 848 231 A (WOOTTON T) 12 November 1974 (1974-11-12) * the whole document *		
A	US 5 424 720 A (KIRKPATRICK ROBERT) 13 June 1995 (1995-06-13) * the whole document *		
-/--			
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 22 July 2002	Examiner Busuiocescu, B
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document</p>			

EPO FORM 1503 03 82 (P04C01)



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 10 7698

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 4 278 841 A (REGENNITTER JACK ET AL) 14 July 1981 (1981-07-14) * the whole document * -----		
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 22 July 2002	Examiner Busuiocescu, B
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPC FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 7698

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

22-07-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2647538	A	30-11-1990	FR 2647538 A1	30-11-1990
EP 0453302	A	23-10-1991	EP 0453302 A1	23-10-1991
FR 2574916	A	20-06-1986	FR 2574916 A1	20-06-1986
EP 0227504	A	01-07-1987	FR 2589561 A1	07-05-1987
			DE 3665767 D1	26-10-1989
			EP 0227504 A1	01-07-1987
US 3491544	A	27-01-1970	NONE	
JP 10276478	A	13-10-1998	NONE	
US 3848231	A	12-11-1974	AU 467666 B	11-12-1975
			AU 3745371 A	05-07-1973
			CA 979097 A1	02-12-1975
			DE 2165754 A1	20-07-1972
			FR 2120139 A5	11-08-1972
			GB 1381734 A	29-01-1975
			IT 944581 B	20-04-1973
			JP 55049358 B	11-12-1980
			US 3689888 A	05-09-1972
US 5424720	A	13-06-1995	US 4970496 A	13-11-1990
			CA 2067121 A1	09-03-1991
			DE 69024056 D1	18-01-1996
			DE 69024056 T2	17-10-1996
			EP 0490990 A1	24-06-1992
			ES 2089030 T3	01-10-1996
			WO 9103805 A1	21-03-1991
US 4278841	A	14-07-1981	NONE	

EPO FORM P0468

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82